


## SH system holder

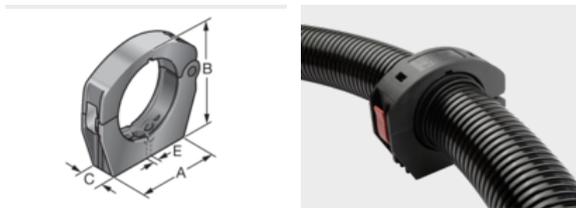

### Product information

The SH system holder is the optimally aligned main component which, especially in conjunction with Murrflex cable protection conduits and the inlays, is able to promise excellent performance in terms of stability, operational flexibility and durability, even under high dynamic loads.

The SH 56/70 & SH 56/70-M system holder is made of a modified, impact resistant polyamide, whereas the SH 56/70-A is made of black anodized aluminium.

- Suitable for initial equipment, subsequent installations or repairs
- Excellent system stability
- Easy assembly of inlays and the cable protection conduit without tools
- Suitable for 4 different applications
- Simple and easy configuration for dynamic or rigid applications
- Cost reduction – only one system holder for every application
- Versatile mounting options

Accessories:

ELR: a corrugated insert (made of red plastic) is secured in the system holder and prevents the ball joint from tilting backward or forward

ELA: a metal locking pin is clamped between the two halves of the ball joint to prevent the ball joint from rotating to the left or right

### Information, conformities and approvals



Article	Order No.	Color	A mm	B mm	C mm	E mm	PU pcs.
<b>System holder without corrugated insert</b>							
SH-P/M25-M32	83691462	Black	73	62	26	6	1
SH-P/M40-M50	83691460	Black	104.5	90	33	10.6	1
SH 56/70	83691490	Black	135	120	33	11.2	1
SH 80/95	83691506	Black	150	147	40	11.2	1
<b>System holder with corrugated insert</b>							
SH-F / M40-M50	83691450	Black	104.5	90	33	10.6	1
<b>System holder with metal closing</b>							
SH M40/M50-M	83691501	Black	118	90	33	11.2	1
SH 56/70-M	83691502	Black	135	120	33	11.2	1
<b>System holder made of aluminium</b>							
SH M40/M50-A	83691503	Black anodized	104.5	90	30	10.6	1
SH 56/70-A	83691504	Black anodized	130	121	34	11.2	1

## SH system holder

Article	Order No.	Color	A mm	B mm	C mm	E mm	PU pcs.
SH 80/95-A	83691508	Black anodized	150	147	40		1
<b>Corrugated insert</b>							
ELR M40-M50	83691480	Red					10

### Material properties



Type SH ... : mod. polyamide  
 Type SH ... -M: mod. polyamide  
 Type SH ... -A: Aluminium mod. polyamide  
 mod. polyamide  
 Aluminium

### Thermal properties



Temperature / temperature range  
 -40 °C - 110 °C / short term: 140 °C

### Fire properties



Fire classification  
 acc. to UL94: V0

### Technical information



Halogen-free

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



ROBI approval

### Classification

ETIM 9: EC000368  
 ECLASS 14: 23140107

---

## SH system holder

---

### General information

Made in  
Germany

Made in Germany

---