



KMH/Q label holder (halogen-free / high packing density)




Product information

High-quality, halogen-free, two-part label holders for the highest demands in the labeling of wires, cables and conduits. KMH/Q label holders for BK idents and type KS labels.

- Assembly with cable ties
- Design adapted to label sleeve KTH/Q

Information, conformities and approvals

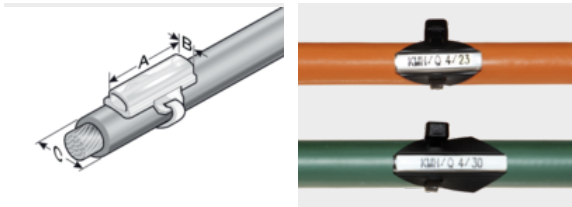

Article	Order No.	Color	Length (A) mm	Width (B) mm	Minimum diameter mm	Cable ties max. width mm	Recommended Label	Number of idents BK23 / BK30	PU pcs.
Labelling lengthwise on the cable/the conduit, single line of print (centred cable ties position)									
KMH/Q 4/23	86223610	Black / Transparent	23	4	5	5	KS 4/x	10 / 7	1000
Labelling lengthwise on the cable/the conduit, single line of print (off centre cable ties position)									
KMH/Q 4/30	86223612	Black / Transparent	30	4	5	5	KS 4/x	13 / 10	1000

Material properties



Thermoplastic polyurethane (TPU)

Thermal properties



Temperature / temperature range

-40 °C - 100 °C / short term: 160 °C

Fire properties



Fire classification

V0



KMH/Q label holder (halogen-free / high packing density)

Technical information



Halogen-free

Approvals and operating permits



EU railway approval

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0010000000000

Assembly method



Cable tie system with sleeves