




ALM Ronden, 1x Bohrung

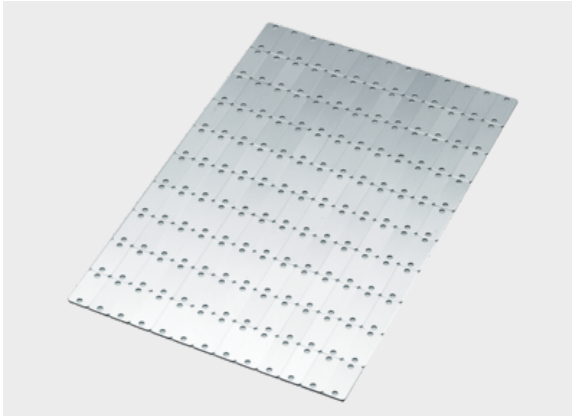

Product information

- Triple-layer material (aluminum-plastic-aluminum)
- Black plastic inner layer
- Outer layer in silver or gold
- Available with self-adhesive foil / adhesive foil
- Thickness: 1.5 mm
- Inscription technique: Engraving

ALUMATT products are high pressure decorative laminated sheets, preferably in plain colors. In contrast to standard laminates, Alumatt has a three-layer symmetrical structure of melamine resin impregnated cellulose sheeting. The color of all layers is exactly defined. The colors of both outer layers are usually in stark contrast to the core color. This color contrast makes the engraving very readable. For engraving, the outer layers are kept very thin. The layer thickness is approximately 0.08 mm. The plain papers are homogeneously colored in the mass. The color connection is secured with these paper qualities. The base is free of heavy metals and has a high level of light stability.

Information, conformities and approvals



| Article | Order No. | Color | Diameter mm | Number x Holes mm | Material thickness mm | Quantity per mat | Software Article | PU pcs. |
|--|------------|-------------------------|-------------|-------------------|-----------------------|------------------|------------------|---------|
| Round (circular blanks); with adhesive foil | | | | | | | | |
| ALM D=20 HF, 1x2,5MM 1) | 8603116010 | Silver / Black / Silver | 20 | 1x 2.5 | 1.5 | 104 | ASA | 104 |
| 1) Other sizes available on request | | | | | | | | |
| 1) Other sizes available on request | | | | | | | | |

| Article | Order No. | Drill hole position X1 mm | Drill hole position Y1 mm |
|-------------------------------------|------------|---------------------------|---------------------------|
| ALM D=20 HF, 1x2,5MM 1) | 8603116010 | 10 | 16.25 |
| 1) Other sizes available on request | | | |

Material properties



Alumatt (ALM)



ALM Ronden, 1x Bohrung

Adhesive properties



467SK adhesive film with adhesive

Thermal properties



Temperature / temperature range

-40 °C - 80 °C

Fire properties



Fire classification

B2

Classification

ETIM 9: EC001530

ECLASS 14: —

UNSPSC 26.0801: 39131504

General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Engraving