


KEG/K ball bearing



Product information

The KEG-K is used wherever cables or cords exit from the cable protection conduit. The type KEG-K ball joint, which can be installed into the SH system holder easily and quickly, is the optimum fit for cords, cables and conduit throughputs; especially because its integratable strain relief is freely configurable to the needs of the application. The KEG-K is the ideal connection of the Murrflex cable protection conduit to the SH system holder. The cables are sealed and strain is relieved at the same time.

Information, conformities and approvals

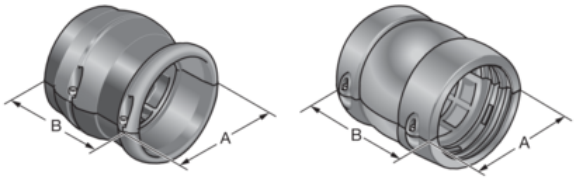


Article	Order No.	Color	A mm	B mm	Suitable for System holder	Version	Suitable for Murrflex	PU pcs.
KEG/K-M25	83692458	Black	46.5	48.5	SH-P/M25-M32	Split	M25/P21	1
KEG/K-M32	83692460	Black	46.5	48.5	SH-P/M25-M32	Split	M32/P29	1
KEG/K-M40	83692462	Black	70	67	SH-P/M40-M50	Split	M40/P36	1
KEG/K-M50	83692464	Black	70	67	SH-P/M40-M50	Split	M50/P48	1
KEG/K-56 ¹⁾	83692466	Black	100.5	122.4	SH 56/70	Split	NW56	1
KEG/K-70 ¹⁾	83692468	Black	100.5	122.4	SH 56/70	Split	NW70	1
KEG/K-80 sw ¹⁾	83692470	Black	126	170	SH 80/95	Split	NW80	1
KEG/K-95 sw ¹⁾	83692472	Black	126	170	SH 80/95	Split	NW95	1

¹⁾ Tightening torque 1.5Nm

¹⁾ Tightening torque 1.5Nm

Material properties



mod. polyamide

KEG/K ball bearing

Thermal properties



Temperature / temperature range

-40 °C – 110 °C

Fire properties



Fire classification

acc. to UL94: V0

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



ROBI approval

Classification

ETIM 9: EC010745

ECLASS 14: 27439090

General information



Made in Germany