



ALM Rectangular without radius, 1x hole

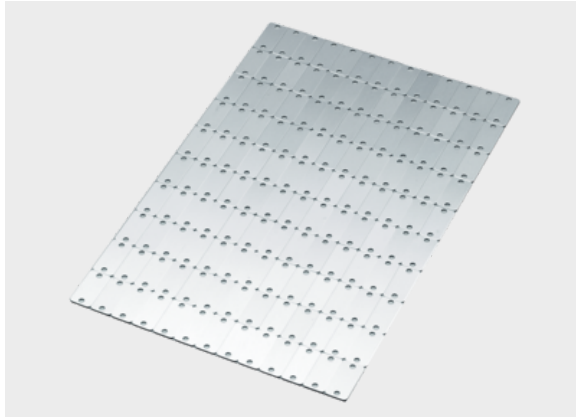

Product information

- Triple-layer material (aluminum-plastic-aluminum)
- Black plastic inner layer
- Outer layer in silver or gold
- Available with self-adhesive foil / adhesive foil
- Thickness: 1.5 mm
- Inscription technique: Engraving


ALUMATT products are high pressure decorative laminated sheets, preferably in plain colors. In contrast to standard laminates, Alumatt has a three-layer symmetrical structure of melamine resin impregnated cellulose sheeting. The color of all layers is exactly defined. The colors of both outer layers are usually in stark contrast to the core color. This color contrast makes the engraving very readable. For engraving, the outer layers are kept very thin. The layer thickness is approximately 0.08 mm. The plain papers are homogeneously colored in the mass. The color connection is secured with these paper qualities. The base is free of heavy metals and has a high level of light stability.

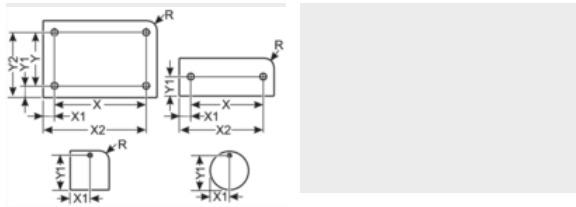

Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Without corner radius; with adhesive foil								
ALM 30x10 HF, 1x3.0MM 1)	8603216000	Silver / Black / Silver	30 x 10	1x 3.0	1.5	200	045	200
ALM 50x20 HF, 1x3.0MM 1)	8603216004	Silver / Black / Silver	50 x 20	1x 3.0	1.5	60	H01	60
Without corner radius; with self-adhesive foil								
ALM 35x20 SK, 1x3.1MM 1)	8603210013	Silver / Black / Silver	35 x 20	1x 3.0	1.5	72	B04	80
1) Other sizes available on request								
1) Other sizes available on request								





ALM Rectangular without radius, 1x hole

Article	Order No.	Drill hole position X1 mm	Drill hole position Y1 mm
ALM 30x10 HF, 1x3.0MM 1)	8603216000	5	5
ALM 50x20 HF, 1x3.0MM 1)	8603216004	10	46
Without corner radius; with self-adhesive foil			
ALM 35x20 SK, 1x3.1MM 1)	8603210013	17.5	16.5

1) Other sizes available on request

Material properties



Alumatt (ALM)

Adhesive properties



467SK adhesive film with adhesive

Thermal properties



Temperature / temperature range

-40 °C - 80 °C

Fire properties



Fire classification

B2

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0



ALM Rectangular without radius, 1x hole

Assembly method



Adhesive system



Screw system

Labelling technology



Engraving