




DM Rectangular without radius, 1x oblong hole

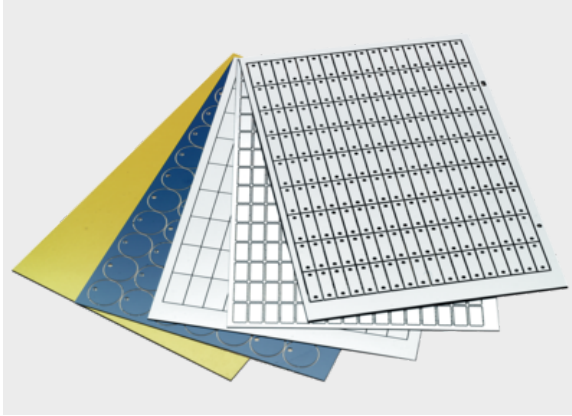


Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm
- Other sizes available on request

Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Without corner radius; with adhesive foil								
DM 20x9 HF, 1x (2x5MM) 1)	8601216006	Siemens silver / Black	20 x 9	1x (2,0x5,0)	1.5	280	3G	280
1) Other sizes available on request								
1) Other sizes available on request								



Article	Order No.	Drill hole position X1 mm	Drill hole position Y1 mm
DM 20x9 HF, 1x (2x5MM) 1)	8601216006	3	4.5

1) Other sizes available on request



DM Rectangular without radius, 1x oblong hole

Adhesive properties



467
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range
-30 °C – 80 °C

Classification

ETIM 9: EC001530
ECLASS 14: —
UNSPSC 26.0801: 39131504

General technical data



Assembly method
00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Plotter



Engraving