


KDP cablequick® Type 149 (149x339 mm)

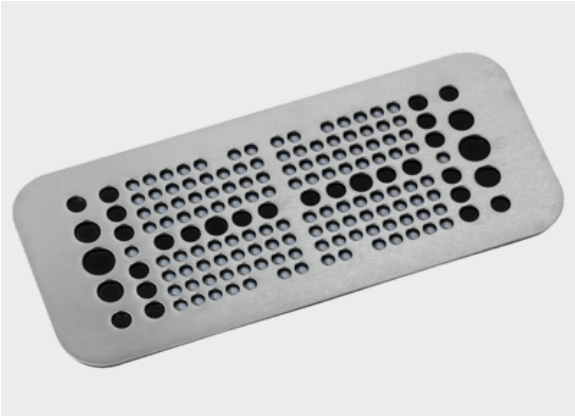





Product information

Efficient connection technology for terminal boxes, control cabinets for tool-free introduction of actuators, sensors, measuring and control instrumentation, optoelectronic, pneumatic lines and drive technology into a control panel. KDPs of product group 149 can be fitted directly into the standard cut-outs of Rittal cabinets. The stainless steel version is particularly suitable for applications in the food and chemical industry. Integrated threaded bolts mean that no screws are visible from outside. Mounting set included in delivery.


Aluminium & Stainless Steel are approved for railway technology (NFPA 130)
V4A : 1.4571
ALU : 3.3535
ST : 1.0037
Rittal cut-out 4


Information, conformities and approvals

Article	Order No.	Color	No. of openings	Openings Quantity x Ø mm	PU pcs.
KDP 149/158, Alu	87663089	Light gray	158	126x 3.5mm-6.2mm 24x 6mm-10mm 6x 8mm-12mm 2x 12mm-18mm	1
KDP 149/56, Alu 1)	87663097	Light gray	56	36x 6mm-10mm 8x 9mm-14mm 8x 14mm-18mm 4x 18mm-25mm	1
KDP 149/78 ST 1)	87663771	Light gray	78	30x 3.5mm-6.5mm 40x 6mm-10mm 4x 11mm-16mm 2x 12mm-18mm 2x 18mm-25mm	1
KDP 149/56 V4A	87663086	Grinded	56	36x 6mm-10mm 8x 9mm-14mm 8x 14mm-18mm 4x 18mm-25mm	1
KDP 149/158 V4A	87663068	Grinded	158	126x 3.5mm-6.2mm 24x 6mm-10mm 6x 8mm-12mm 2x 12mm-18mm	1

1) no UR-approval

1) no UR-approval





KDP cablequick® Type 149 (149x339 mm)

Article	Order No.	A mm	B mm	a mm	b mm	c mm	d mm	e mm	g mm
KDP 149/56, Alu 1)	87663097	339	149	303	115	161.5	66.5	5	120
KDP 149/78 ST 1)	87663771	339	149	303	115	161.5	66.5	5	120
KDP 149/56 V4A	87663086	339	149	303	115	161.5	66.5	5	120
KDP 149/158 V4A	87663068	339	149	303	115	161.5	66.5	5	120

1) no UR-approval

Material properties

Seal: NBR/EPDM NBR/EPDM

Thermal properties

Temperature / temperature range

-45 °C – 90 °C

Protection class

Protection class

IP65

Fire properties

Fire classification

HB Housing:
Seal:

Resistant to:

Alcohol
Greases
Fuels
Lyes
Mineral oils
Weak acids

Technical information

Halogen-free

KDP cablequick® Type 149 (149x339 mm)

Technical information

LABS free

According to ISO 4892-2

Conformity

RoHS (EC Directive 2011/65/EU)

Approvals and operating permits

cURus approval

Classification

ETIM 9: EC002624
ECLASS 14: 27182815
UNSPSC 26.0801: 39121312

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.
The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.
A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.
All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.
They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.
Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.
Murrplastik accepts no liability for damage caused as a result of using our products.
Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.
Our General Terms and Conditions apply.