




ESL self-laminating label

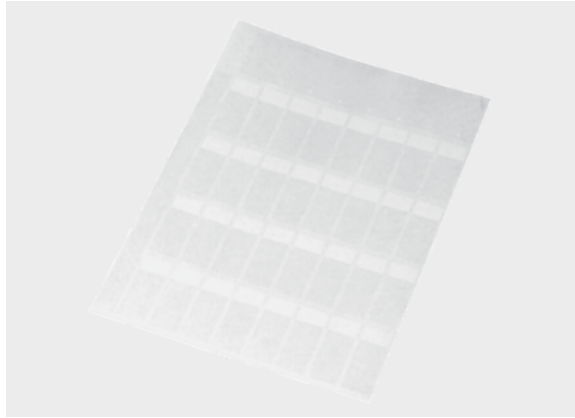

Product information

Self-laminating, high-quality polyester sheet labels for single-line and multi-line inscriptions. The transparent extension strip sticks over the printable area and keeps the inscription clean and intact. The grid system allows direct removal of each label.

Information, conformities and approvals



Article	Order No.	Color	RAL similar	Label size (B x A) mm	Printable area mm (D x C)	Number of columns	Quantity per sheet	Software Article	PU pcs.
ESL 20x12R 1)	86562450	White	9016	12 x 20	12 x 7	13	156	126	1560
ESL 35x17R 1)	86562452	White	9016	17 x 35	17 x 9	10	70	124	1400
ESL 56x21R 1)	86562454	White	9016	21 x 56	21 x 13	8	32	113	800
ESL 56x21R 1)	86562460	Yellow	1018	21 x 56	21 x 13	8	32	A41	800
ESL 93x31R 1)	86562456	White	9016	31 x 93	31 x 25	5	15	127	300
ESL 140x47R 1)	86562458	White	9016	47 x 140	47 x 30	4	8	125	200

1) Calculation of the maximum application area: $\emptyset = (A-C) / 3.14$

1) Calculation of the maximum application area: $\emptyset = (A-C) / 3.14$

Material properties



Polyester film



ESL self-laminating label

Adhesive properties



4830Adhesive

Thermal properties



Temperature / temperature range

-40 °C - 150 °C

Fire properties



Fire classification

V0

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0000000100000

Assembly method



Adhesive system

Labelling technology



Plotter



Laser printer