


LM Circular blank

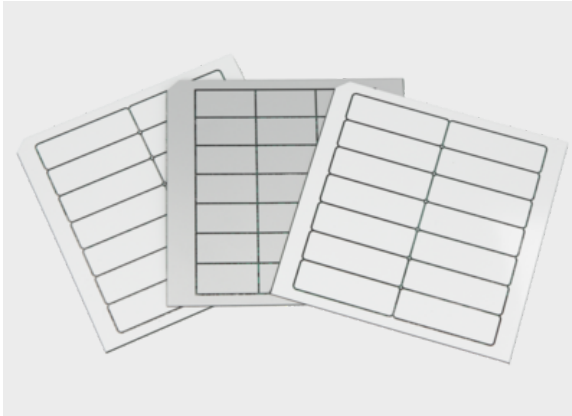



Product information

Laser Mat is a double-layer material with a UV resistant, colored outer layer for marking with a Murrplastik laser system.

- Custom configuration
- Various colors
- Different geometries and holes
- Three different carrier materials available
- Material thickness 0.8 mm

A suction and filter unit is absolutely necessary to comply with legal regulations on health protection.

Information, conformities and approvals



Article	Order No.	Color	Material thickness mm	Diameter mm	Quantity per frame	Software Article	PU pcs.
Circular blanks (round version)							
LM D=22.4 SK	8610200089	White / Black	0.8	22.4	16	LOA	64

Material properties



Double-layer plastic Laser Mat (LM) Laser Mat (LM)

Adhesive properties



467
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range
-20 °C – 85 °C



LM Circular blank

Technical information



UV-resistant acc. to ISO 4892-2

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method
00000000000000

Labelling technology



Laser