


## ALM Rectangular without radius, 4x hole

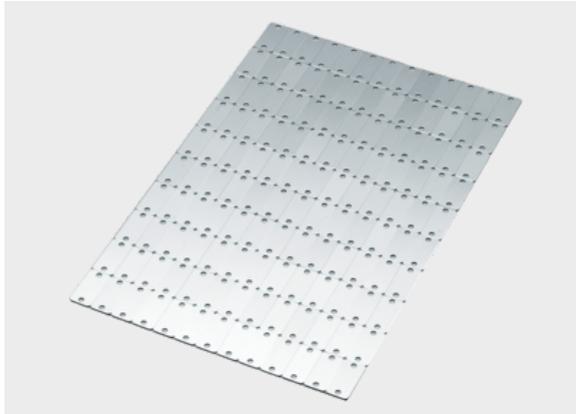


### Product information

- Triple-layer material (aluminum-plastic-aluminum)
- Black plastic inner layer
- Outer layer in silver or gold
- Available with self-adhesive foil / adhesive foil
- Thickness: 1.5 mm
- Inscription technique: Engraving

ALUMATT products are high pressure decorative laminated sheets, preferably in plain colors. In contrast to standard laminates, Alumatt has a three-layer symmetrical structure of melamine resin impregnated cellulose sheeting. The color of all layers is exactly defined. The colors of both outer layers are usually in stark contrast to the core color. This color contrast makes the engraving very readable. For engraving, the outer layers are kept very thin. The layer thickness is approximately 0.08 mm. The plain papers are homogeneously colored in the mass. The color connection is secured with these paper qualities. The base is free of heavy metals and has a high level of light stability.

### Information, conformities and approvals

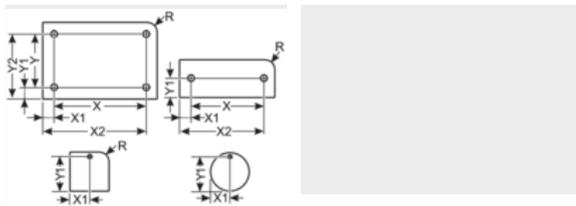

Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
<b>Without corner radius; with high-strength adhesive foam foil</b>								
ALM 75x100 SKS, 4x3.4MM	8603242000	Silver / Black / Silver	75 x 100	4x 3.4	1.5		A0T	8
<b>Without corner radius; with adhesive foil</b>								
ALM 60x100 HF, 4x3.3MM	8603246001	Silver / Black / Silver	60 x 100	4x 3.3	1.5	10	906	10
ALM 85x85 HF, 4x4.0MM	8603246006	Silver / Black / Silver	85 x 85	4x 4.0	1.5	9	H86	9
ALM 100x40 HF, 4x3.3MM	8603246000	Silver / Black / Silver	100 x 40	4x 3.3	1.5	15	905	15
ALM 100x200 HF, 4x2.6MM	8603246005	Silver / Black / Silver	100 x 200	4x 2.6	1.5	3	9K	3
ALM 125x125 HF, 4x3.5MM	8603246002	Silver / Black / Silver	125 x 125	4x 3.5	1.5	2	6C	2
ALM 140x180 HF, 4x3.0MM	8603246011	Silver / Black / Silver	140 x 180	4x 3.0	1.5	2	Z77	2
ALM 140x200 HF, 4x3.0MM	8603246008	Silver / Black / Silver	140 x 200	4x 3.0	1.5	2	L56	2
ALM 150x75 HF, 4x3.2MM	8603246007	Silver / Black / Silver	150 x 75	4x 3.2	1.5	4	J45	4
ALM 150x115 HF, 4x3.5MM	8603246003	Silver / Black / Silver	150 x 115	4x 3.5	1.5	2	6D	2



## ALM Rectangular without radius, 4x hole


Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
ALM 300x100 HF, 4x3.0MM 1)	8603246009	Silver / Black / Silver	300 x 100	4x 3.0	1.5	2	L57	2
ALM 220x60 HF, 4x3.5MM 1)	8603246028	Silver / Black / Silver	220 x 60	4x 3.5	1.5	3	A3H	3
ALM 230x150 HF, 4x3.5MM (E) 1)	8603246004	Silver / Black / Silver	230 x 150	4x 3.5	1.5	1	6E	1

**Without corner radius; with self-adhesive foil**

ALM 80x200 SK, 4x3.2MM 1)	8603240002	Silver / Black / Silver	80 x 200	4x 3.2	1.5	3	U17	3
ALM 85x65 SK, 4x4.0MM 1)	8603240006	Silver / Black / Silver	85 x 65	4x 4.0	1.5	9	H73	9
ALM 125x45 SK, 4x3.0MM 1)	8603240005	Silver / Black / Silver	125 x 45	4x 3.0	1.5	8	B48	8
ALM 125x65 SK, 4x3.0MM 1)	8603240004	Silver / Black / Silver	125 x 65	4x 3.0	1.5	6	B38	6
ALM 125x80 SK, 4x3.0MM 1)	8603240003	Silver / Black / Silver	125 x 80	4x 3.0	1.5	4	B37	4
ALM 150x100 SK, 4x3.5MM 1)	8603240000	Silver / Black / Silver	150 x 100	4x 3.5	1.5	4	228	4
ALM 205x105 SK, 4x3.2MM (E) 1)	8603240001	Silver / Black / Silver	205 x 105	4x 3.2	1.5	1	U16	6

1) Other sizes available on request

1) Other sizes available on request

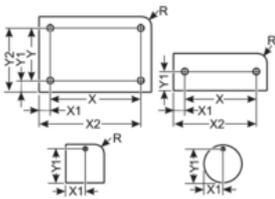

Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
ALM 75x100 SKS, 4x3.4MM	8603242000	64.45	89.45	5.28	5.28	69.73	94.73

**Without corner radius; with adhesive foil**

ALM 60x100 HF, 4x3.3MM 1)	8603246001	52	92	4	4	56	96
ALM 85x65 HF, 4x4.0MM 1)	8603246006	75	55	5	5	80	60



## ALM Rectangular without radius, 4x hole

Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
ALM 100x40 HF, 4x3.3MM 1)	8603246000	92	32	4	4	96	36
ALM 100x200 HF, 4x2.6MM 1)	8603246005	90	190	5	5	95	195
ALM 125x125 HF, 4x3.5MM 1)	8603246002	115	115	5	5	120	120
ALM 140x180 HF, 4x3.0MM 1)	8603246011	170	130	5	5	175	135
ALM 140x200 HF, 4x3.0MM 1)	8603246008	126	186	7	7	133	193
ALM 150x75 HF, 4x3.2MM 1)	8603246007	140	65	5	5	145	70
ALM 150x115 HF, 4x3.5MM 1)	8603246003	140	105	5	5	145	110
ALM 300x100 HF, 4x3.0MM 1)	8603246009	286	86	7	7	293	93
ALM 220x60 HF, 4x3.5MM 1)	8603246028	212	52	4	4	216	56
ALM 230x150 HF, 4x3.5MM (E) 1)	8603246004	220	140	5	5	225	145
<b>Without corner radius; with self-adhesive foil</b>							
ALM 80x200 SK, 4x3.2MM 1)	8603240002	70	190	5	5	75	195
ALM 85x65 SK, 4x4.0MM 1)	8603240006	75	55	5	5	80	60
ALM 125x45 SK, 4x3.0MM 1)	8603240005	117	37	4	4	121	41
ALM 125x65 SK, 4x3.0MM 1)	8603240004	117	57	4	4	121	61
ALM 125x80 SK, 4x3.0MM 1)	8603240003	117	72	4	4	121	76
ALM 150x100 SK, 4x3.5MM 1)	8603240000	144	94	3	3	147	97
ALM 205x105 SK, 4x3.2MM (E) 1)	8603240001	195	95	5	5	200	100
1) Other sizes available on request							

### Material properties



Alumatt (ALM)

### Adhesive properties



467SK adhesive film with adhesive



## ALM Rectangular without radius, 4x hole

### Thermal properties



Temperature / temperature range

-40 °C - 80 °C

### Fire properties



Fire classification

B2

### Classification

ETIM 9: EC001288

ECLASS 14: 27144009

UNSPSC 26.0801: 39131504

### General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0

### Assembly method



Adhesive system



Screw system

### Labelling technology



Engraving