

## FHS-C support bracket




### Product information

The FHS-C has been designed for the direct insertion of lines or protective conduits. The hook-and-loop tape has a slip-resistant coating and wraps around the cable packet as well as the robot. The variable lengths of hook-and-loop tape and the special contour of the base element makes the system exceptionally well suited for assemblies on a variety of robot models and machine components.

Advantages:

- low interference contour
- saves space
- low weight
- secure hold, even on conical surfaces
- quick fit, without pre-drilling
- quick routing adjustment is possible during implementation

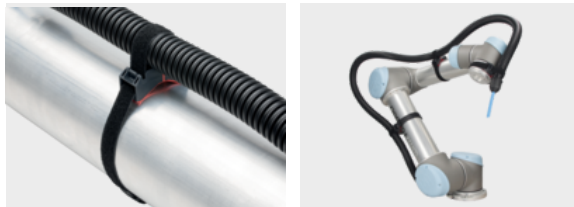

### Information, conformities and approvals



Article	Order No.	Color	Length of hook-and-loop tape mm	PU pcs.
FHE 16-29 1)	83693421	Black / Red		1
FHS-C 300	83693441	Black / Red	300	1
FHS-C 350	83693443	Black / Red	350	1
FHS-C 450	83693445	Black / Red	450	1
FHS-C 550	83693447	Black / Red	550	1
FHS-C 650	83693448	Black / Red	650	1
FHS-C 750	83693449	Black / Red	750	1
FHS-C Set 2)	83693442	Black / Red	350 - 750	1

1) Body without hook-and-loop tape  
2) Set with 4 hook-and-loop tapes

1) Body without hook-and-loop tape  
2) Set with 4 hook-and-loop tapes

## FHS-C support bracket

### Material properties



Polypropylene (PP)  
Thermoplastic elastomer

### Thermal properties



Temperature / temperature range  
-30 °C - 80 °C

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



ROBI approval

### Classification

ETIM 9: EC000449  
ECLASS 14: 23152522