




## Cable entry plate plastic type KDP/Z FDA

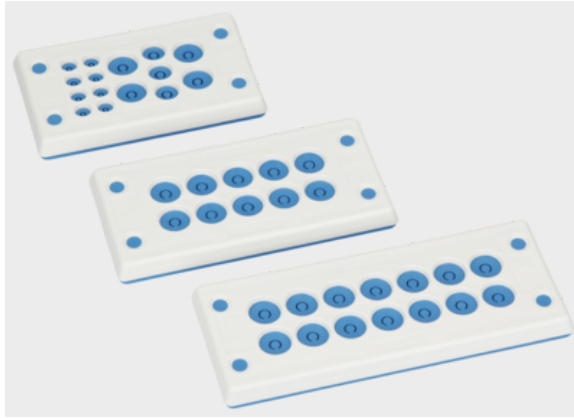


### Product information

Very flat cable entry plate made of plastic with a 2-component design and best properties

- Enormous time savings in assembly
- High packing density
- Large wire diameter ranges
- Especially for use in the food and pharmaceutical sectors
- Protection class: IP 67
- Thermal stability: -30 °C to +70 °C
- Material: Frame: Polypropylene (PP) / Seal: TPE
- RoHS compliant
- UV resistant
- Made in Germany

- Suitable for standard cut-outs for 24-, 16- and 10-pin industrial connectors
- Assembly with clips or M5 screws possible

### Information, conformities and approvals

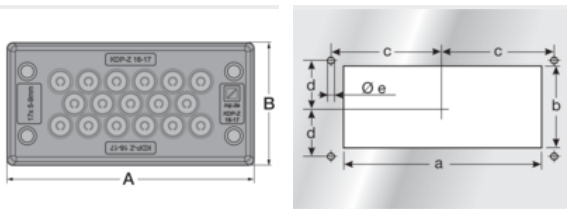


Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
<b>KDP/Z 10 cable entry plate, plastic</b>						
KDP/Z 10/14-FDA, WS/BL, VE 5	87303282	White / Blue	14	14x 5 mm - 9 mm	10-pole	5
KDP/Z 10/15-FDA, WS/BL, VE 5	87303284	White / Blue	15	8x 3 mm - 6 mm 3x 5 mm - 9 mm 4x 7.5 mm - 12 mm	10-pole	5
<b>KDP/Z 16 cable entry plate, plastic</b>						
KDP/Z 16/10-FDA, WS/BL, VE 5	87303254	White / Blue	10	10x 7.5 mm - 12 mm	16-pole	5
KDP/Z 16/12-FDA, WS/BL, VE 5	87303256	White / Blue	12	2x 3 mm - 5 mm 4x 5 mm - 9 mm 2x 7.5 mm - 12 mm 2x 10 mm - 16 mm 2x 14 mm - 20 mm	16-pole	5
KDP/Z 16/17-FDA, WS/BL, VE 5	87303258	White / Blue	17	17x 5 mm - 9 mm	16-pole	5
KDP/Z 16/24-FDA, WS/BL, VE 5	87303260	White / Blue	24	16x 3 mm - 6 mm 6x 5 mm - 9 mm 2x 7.5 mm - 12 mm	16-pole	5
KDP/Z 16/40-FDA, WS/BL, VE 5	87303262	White / Blue	40	20x 2 mm - 4 mm 20x 3 mm - 6 mm	16-pole	5
<b>KDP/Z 24 cable entry plate, plastic</b>						
KDP/Z 24/3-FDA	87303202	White / Blue	3	3x 22 mm - 33 mm	24-pole	5



## Cable entry plate plastic type KDP/Z FDA

Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/Z 24/14-FDA, WS/BL, VE 5	87303210	White / Blue	14	14x 7.5 mm - 12 mm	24-pole	5
KDP/Z 24/14-1-FDA, WS/BL, VE 5	87303220	White / Blue	14	2x 3 mm - 6 mm 4x 5 mm - 9 mm 3x 7.5 mm - 12 mm 3x 10 mm - 16 mm 2x 14 mm - 20 mm	24-pole	5
KDP/Z 24/23-FDA, WS/BL, VE 5	87303230	White / Blue	23	23x 5 mm - 9 mm	24-pole	5
KDP/Z 24/30-FDA, WS/BL, VE 5	87303240	White / Blue	30	20x 3 mm - 6 mm 6x 5 mm - 9 mm 4x 7.5 mm - 12 mm	24-pole	5
KDP/Z 24/48-FDA, WS/BL, VE 5	87303250	White / Blue	48	20x 2 mm - 4 mm 28x 3 mm - 6 mm	24-pole	5

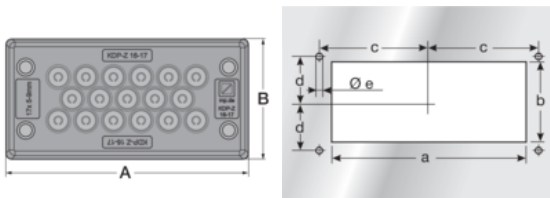

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/Z 10/14-FDA, WS/BL, VE 5	87303282	11	103	61	65	36	41.5	16	5.5
KDP/Z 10/15-FDA, WS/BL, VE 5	87303284	11	103	61	65	36	41.5	16	5.5
<b>KDP/Z 16 cable entry plate, plastic</b>									
KDP/Z 16/10-FDA, WS/BL, VE 5	87303254	11	123	61	86	36	51.5	16	5.5
KDP/Z 16/12-FDA, WS/BL, VE 5	87303256	11	123	61	86	36	51.5	16	5.5
KDP/Z 16/17-FDA, WS/BL, VE 5	87303258	11	123	61	86	36	51.5	16	5.5
KDP/Z 16/24-FDA, WS/BL, VE 5	87303260	11	123	61	86	36	51.5	16	5.5
KDP/Z 16/40-FDA, WS/BL, VE 5	87303262	11	123	61	86	36	51.5	16	5.5
<b>KDP/Z 24 cable entry plate, plastic</b>									
KDP/Z 24/3-FDA	87303202	11	149	61	112	36	65	16	5.5
KDP/Z 24/14-FDA, WS/BL, VE 5	87303210	11	149	61	112	36	65	16	5.5
KDP/Z 24/14-1-FDA, WS/BL, VE 5	87303220	11	149	61	112	36	65	16	5.5



## Cable entry plate plastic type KDP/Z FDA

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/Z 24/23-FDA, WS/BL, VE 5	87303230	11	149	61	112	36	65	16	5.5
KDP/Z 24/30-FDA, WS/BL, VE 5	87303240	11	149	61	112	36	65	16	5.5
KDP/Z 24/48-FDA, WS/BL, VE 5	87303250	11	149	61	112	36	65	16	5.5

### Thermal properties



Temperature / temperature range

-45 °C - 70 °C

### Protection class



Protection class

IP67  
IP69K (with matching cables)

### Technical information



Halogen-free



Lead-free

### Assembly method



### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



FDA compliance



ECOLAB approval



## Cable entry plate plastic type KDP/Z FDA

### Approvals and operating permits



UL Type 12



UL Type 4x

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815